

SYLVANIA

SYLVANIA

Feilo Sylvania International Group
Duna Tower
Népfürdő Street 22
1138 Budapest, Hungary
T: +3618805900
E: info.cee@sylvania-lighting.com



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited. Copyright Feilo Sylvania Europe Limited November 2020

sylvania-lighting.com

A Feilo Sylvania Company

Fast, simple, cost effective lighting

Trade and Installer Collection 2021

Trade and Installer Collection 2021

Fast, simple, cost effective lighting

Light your world





Light your world

At Sylvania we empower people to control their environment, giving them the freedom to grow, think, work, play; to live and to focus on the things that matter.

Bringing light to life, we've got it covered

Our Products

START TM eco

Sylvania's simple, cost effective, 3 year warranty trade range for energy efficient lighting of commercial and residential premises.

START TM

Sylvania's contractor focused 5 year warranty range for a wider choice of applications including commercial and industrial.

SYLVANIA

Sylvania are one of the world's leading light specialists. Not only do we design and manufacture lighting solutions, we push the boundaries of technology and strive to innovate in everything we do. Our specification luminaires range offers the choice, functionality and flexibility to meet your individual project requirements.

Concord

Concord luminaires by Sylvania provide one of Europe's most respected architectural lighting ranges for high specification architectural lighting. With a strong manufacturing base in the UK, Concord luminaires are renowned for their influential design ethos, high technical performance and aesthetic form.

TRADE AND INSTALLER COLLECTION



Fast, simple, cost effective lighting 2021

PROFESSIONAL COLLECTION




Architectural and specification lighting 2021

SYLVANIA

For over 100 years Sylvania has been an innovator in lamps technology. The company was the first to establish mass production of fluorescent lamps and invented the first dichroic reflector. We continue to invest in our research centres and LED technologies to stay at the forefront of the replaceable light source industry in the coming decades.

LAMPS RANGE

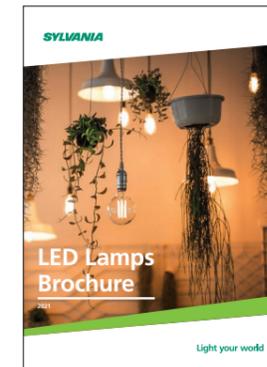


Lamps Catalogue 2021

Our Solutions

SylSmart Intelligent Lighting Control

Sylvania's smart lighting control system, SylSmart allows users to harness light like never before. Light can be controlled throughout an entire room or building, ensuring incredible flexibility in lighting control, combined with maximum energy efficiency. SylSmart solutions are rapidly installed, easy to commission and fully customisable to tailor the light to your needs

WIRELESS CONTROL SYSTEMS

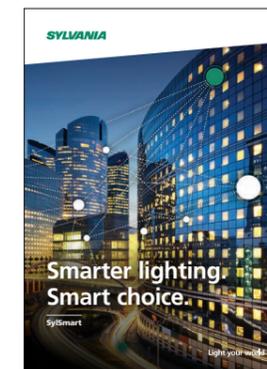

For full details on our Sylsmart Controls systems please visit sylvania-lighting.com/sylsmart

YourHome

Sylvania's YourHome range is designed with the consumer in mind. We supply the perfect luminaire or lamp for every home application. From creating a warm ambient light in the living room to a productive, functional atmosphere in the home office, all of our solutions are shaped around the flexibility required by our customers to light their homes to their individual tastes.

CONSUMER RANGE




For full details on our consumer products, such as LED Pipe, Sylmirror, Gizmo Indoor and Gizmo Outdoor - please visit sylvania-lighting.com

SmartServices for complete peace of mind

Smart Services are designed to compliment Sylvania's comprehensive range of light fixtures, both indoor and outdoor, providing a total solution service. Our services will take your project through the required steps from conception, and energy audit, all the way to completion plus commissioning, via all the required key stages including project financing with Smarter Finance


LIGHTING SERVICES PORTFOLIO

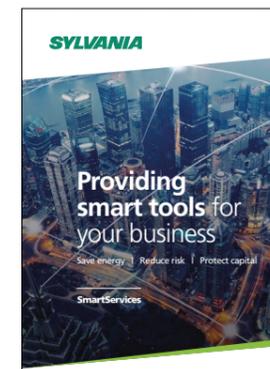


For full details on our SmartServices portfolio please visit sylvania-lighting.com/smart-services

| | | |
|--|--|--|
|  Warranty Warranty period in years |  New Please enquire regarding stock availability |  Coming soon Preliminary technical data Please enquire for availability |
|  Non Dimmable Product is not dimmable |  Mains Dim Product is mains dimmable |  Dim To Warm Colour warms when dimmed |
|  Switch Dim On-board dimming option |  Dual Tone White Adjustable from warm white to cool white via on-board switch |  1-10V 1-10V dimming option available |
|  DALI DALI dimming option available |  SylSmart Smart Wireless Control Enabled |  Tunable White Customized white light via external control |
|  RGB RGB colour change option available |  RGBW RGBW colour change option available |  Microwave Microwave sensor option available |
|  PIR There is a PIR sensor option available |  IP Rating Ingress protection against dust and liquid <i>* Rating behind ceiling void is IP20</i> |  IK Rating Level of impact protection |
|  SDCM SDCM rating for measurement of colour consistency |  UGR Glare rating is UGR <16 or <19 or above |  CRI Colour rendering index levels |
|  Beam Angle Angle of light distribution XX° |  Tilt Angle Angle in which the fixture can be tilted XX° |  Rotation Angle Angle in which the fixture can be rotated 360° |
|  Insulation Class I Protection against electric shock by protective earthing |  Insulation Class II Protection against electric shock by double or reinforced insulation, but no protective earth |  Insulation Class III Protection against electric shock by using power supply with safety extra-low voltage |
|  Emergency 3 hour emergency versions |  CE Conforms to European regulations |  EAC Conforms to Eurasian regulations |
|  Max Ambient Temp. Maximum environmental temperature XX°C |  Cut Out Dimension of cut out required to install product |  Energy Class Energy efficiency category A++ |
|  Without Lamp Product comes without lamp |  Coolfit Lamp Ensures overheat and overtemperature protection |  Fire Rated Certified to 30, 60, 90 minutes |

Level of protection from solid and liquid materials

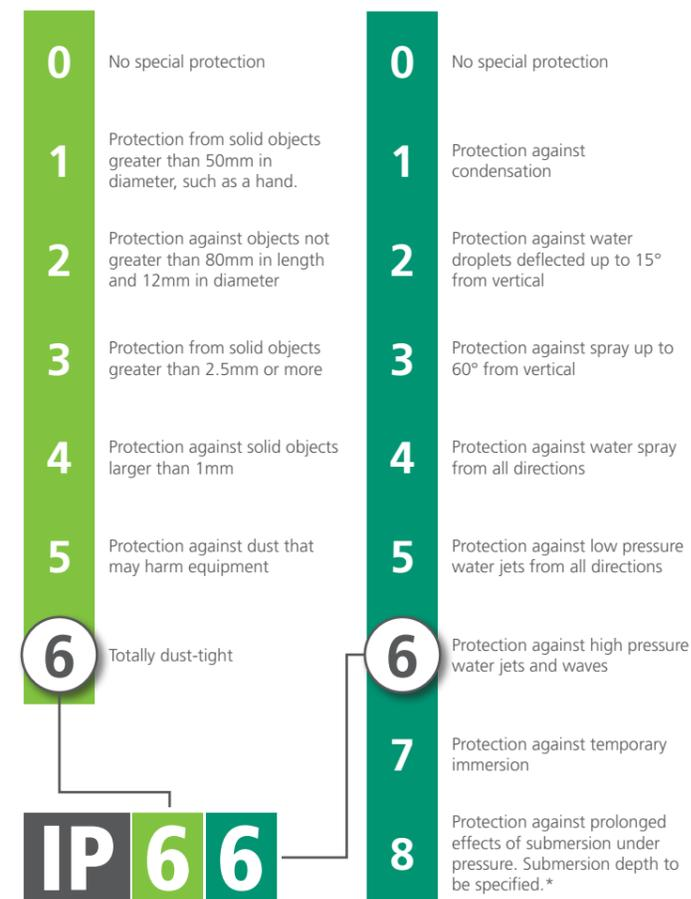

Level of protection against mechanical impacts.

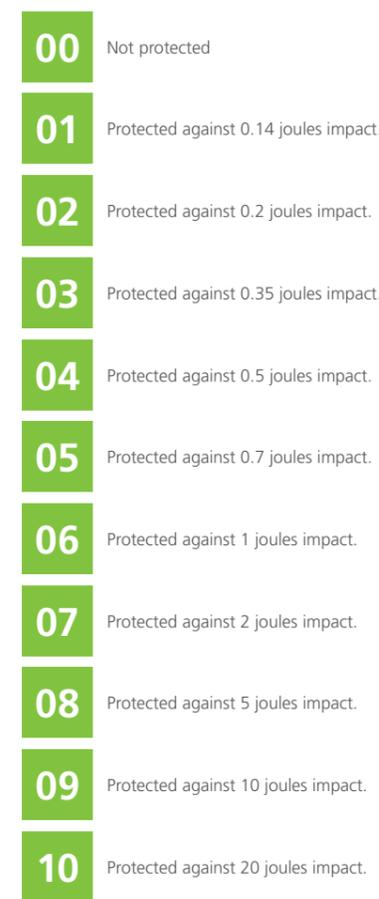


START eco Panel



Features

- Perfect for general lighting applications such as circulation areas, corridors and breakout areas
- A cost effective panel with efficacy of up to 89lm/W
- Uniform light distribution across the diffuser, no dark or hot spots
- Slim profile with height of 34mm (64mm including driver)**
- Designed for 600 x 600 and 1200 x 300 t-grid ceiling panels
- Accessories available for 3 hour emergency, suspension and surface mounting
- Available in 3,000K, 4,000K or 6,500K
- Lifetime: 30,000 hours

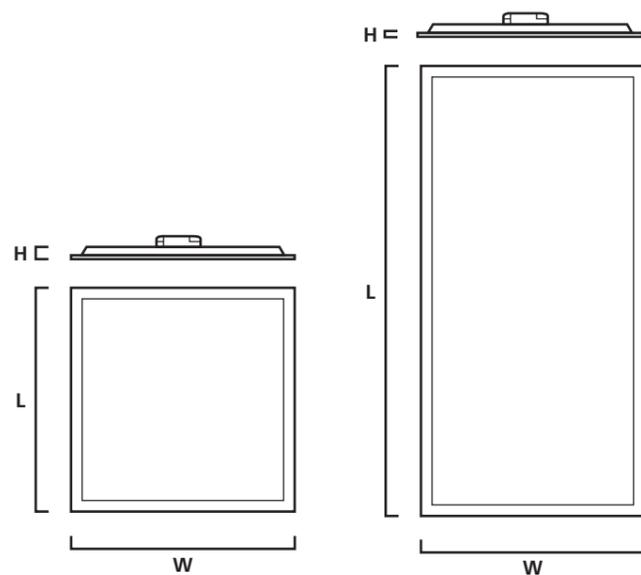


| Size (W x L x H) | Wattage | Lumen | UGR |
|-------------------------|---------|---------|-----|
| 596mm x 596mm x 34mm** | 36W | 3,200lm | <22 |
| 1195mm x 295mm x 34mm** | 36W | 3,200lm | <22 |

START Panel Flat



Features

- Designed for office and general lighting applications such as circulation areas, corridors and breakout areas
- High performance: Standard and UGR<19 versions deliver 100lm/W, High Efficiency versions 123lm/W
- Edge-lit LED technology allows the panel to be lightweight and slim (9.5mm)
- Low glare version available (UGR<19) with prismatic diffuser for office spaces (complies to EN 12464-1)
- Designed for 600 x 600, 625 x 625, 1200 x 300 and 1200 x 600 t-grid ceiling panels
- Accessories available for suspension and surface mount (ready made frame or kit)
- 3 hour emergency conversion kit available
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

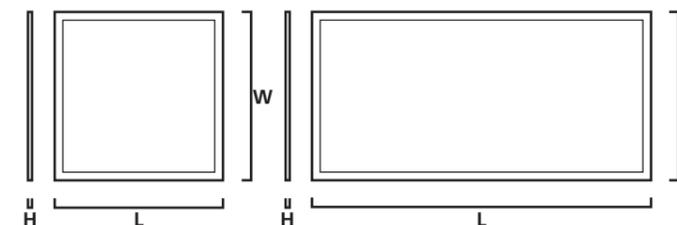


| Size (W x L x H) | Wattage | Lumen | UGR |
|-------------------------|---------|---------|-----|
| 295mm x 1195mm x 10.8mm | 35W | 4,300lm | <22 |
| 295mm x 1195mm x 10.8mm | 35W | 3,500lm | <19 |
| 595mm x 1195mm x 10.8mm | 55W | 6,100lm | <22 |
| 595mm x 1195mm x 10.8mm | 55W | 5,500lm | <19 |
| 596mm x 596mm x 9.5mm | 40W | 4,000lm | <22 |
| 596mm x 596mm x 9.5mm | 35W | 4,300lm | <22 |
| 596mm x 596mm x 9.5mm | 35W | 3,500lm | <19 |
| 596mm x 596mm x 9.5mm | 40W | 4,000lm | <19 |
| 596mm x 596mm x 9.5mm | 48W | 4,800lm | <19 |
| 621mm x 621mm x 10mm | 35W | 4,300lm | <22 |
| 621mm x 621mm x 10mm | 40W | 4,000lm | <19 |




For ordering guide please visit page XX.

START Panel

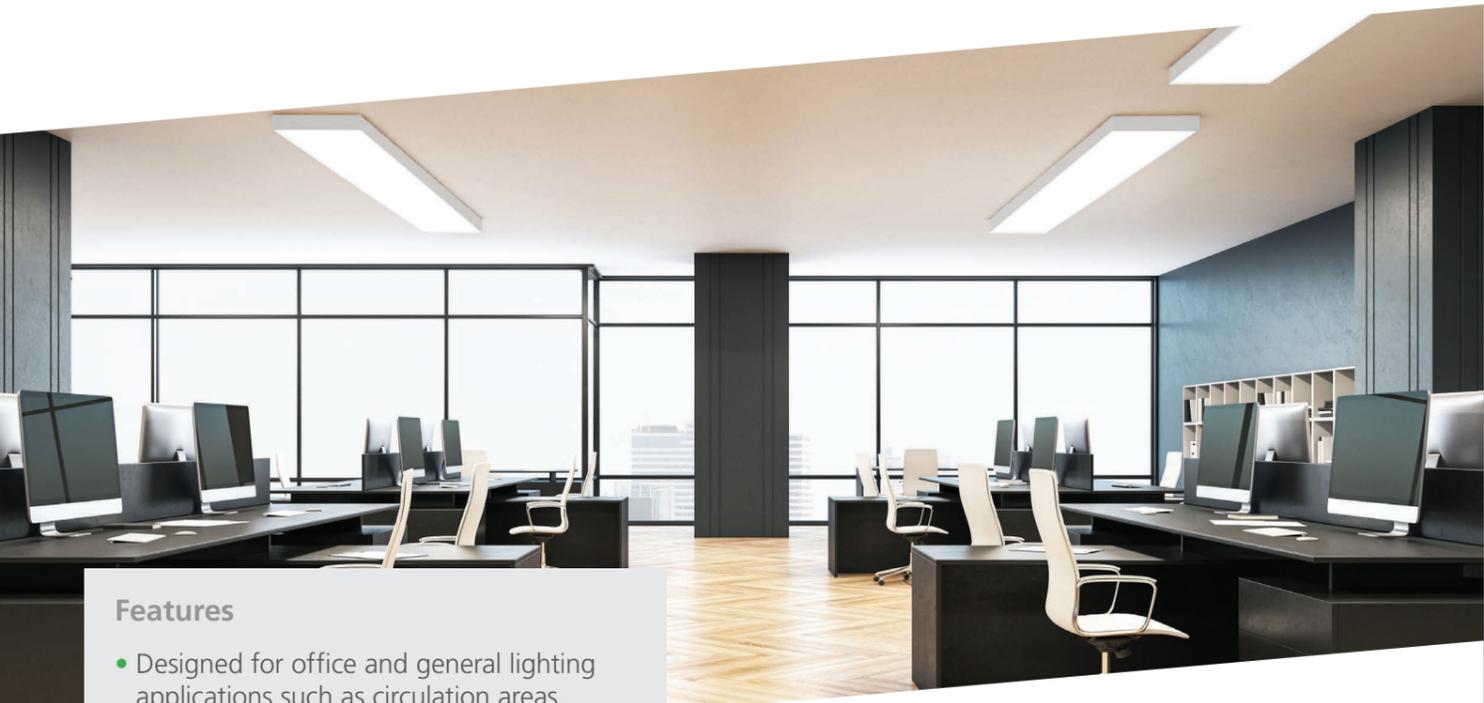


Features

- Designed for office and general lighting applications such as circulation areas, corridors and breakout areas
- High performance: Standard and UGR<19 versions deliver 100lm/W, High Efficiency versions 120lm/W
- Low glare version available (UGR<19) with prismatic diffuser for office spaces (complies to EN 12464-1)
- Designed for 600 x 600, 625 x 625, 1200 x 300 and 1200 x 600 t-grid ceiling panels
- Accessories available for suspension and surface mount (ready made frame or kit)
- 3 hour emergency conversion kit available
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

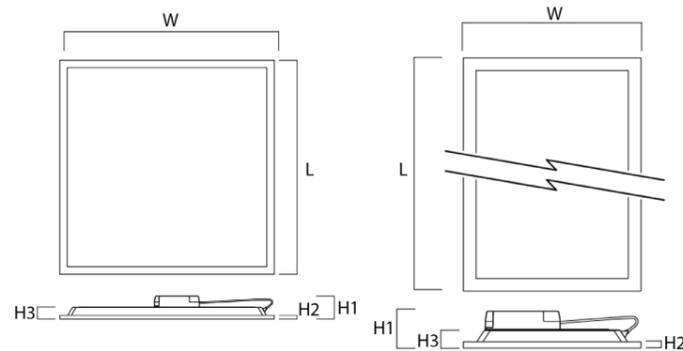


| Size (W x L x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 595mm x 595mm x 35mm | 40W | 4,000lm | <22 |
| 595mm x 595mm x 35mm | 36W | 4,300lm | <22 |
| 595mm x 595mm x 35mm | 36W | 3,600lm | <19 |
| 595mm x 595mm x 35mm | 40W | 4,000lm | <19 |
| 295mm x 1195mm x 35mm | 40W | 4,000lm | <19 |
| 595mm x 1195mm x 35mm | 56W | 5600lm | <19 |

START Panel Multipower

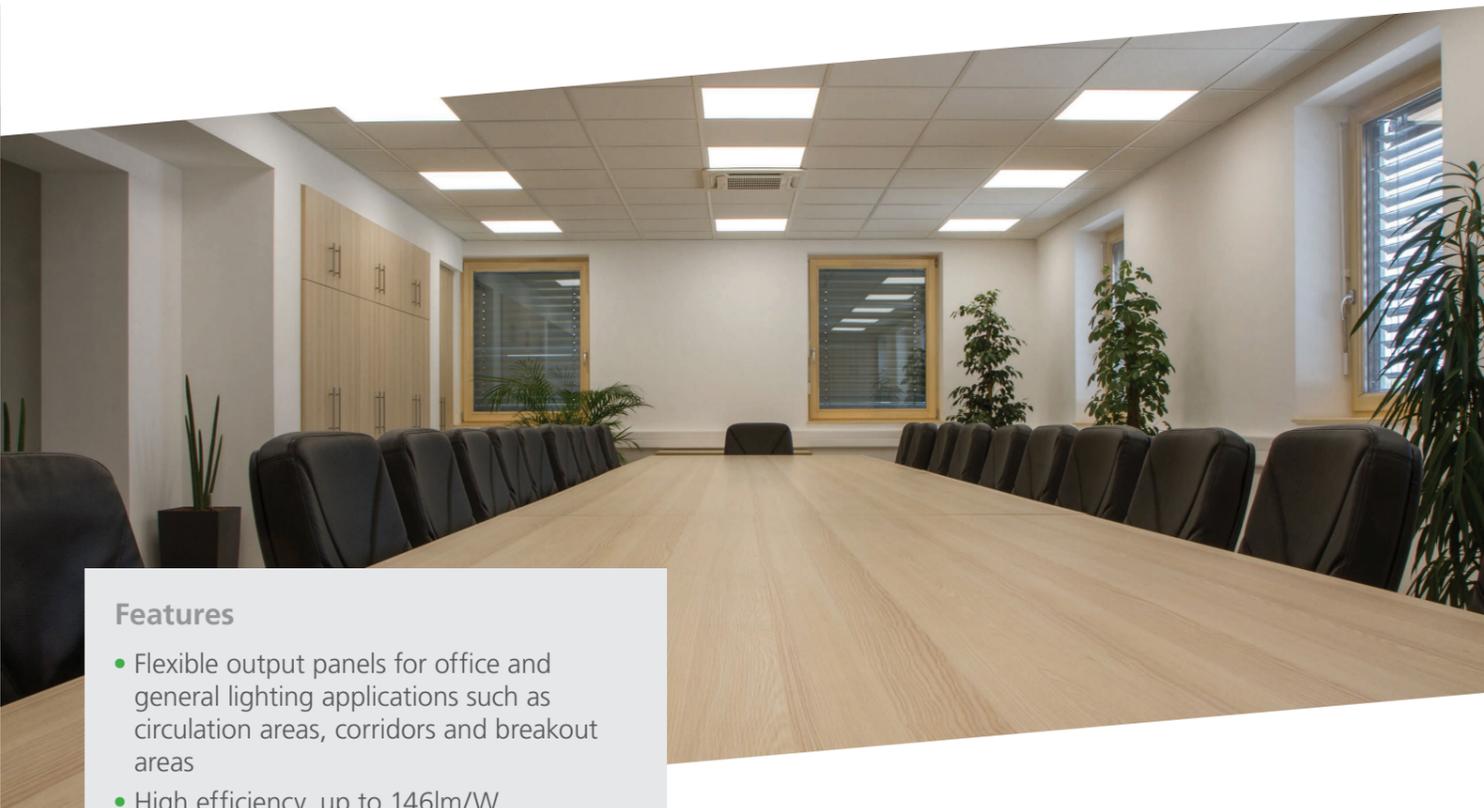


Features

- Flexible output panels for office and general lighting applications such as circulation areas, corridors and breakout areas
- High efficiency, up to 146lm/W
- Multipower option provides 8 different power levels / lumen outputs per product
- Low glare version available (UGR<19), for office spaces (complies to EN12464-1)
- Designed for 600 x 600 and 625 x 625 t-grid ceiling panels
- Plasterboard and Surface mounting kits available
- Emergency conversion kit available
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

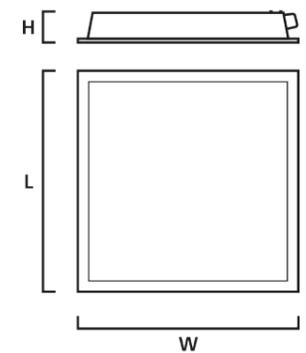

| Size (W x L x H) | Wattage | Lumen | UGR |
|----------------------|---------|---------------|-----|
| 596mm x 596mm x 63mm | 12-35W | 1,825-5,100lm | <22 |
| 596mm x 596mm x 63mm | 12-35W | 1,625-4,450lm | <19 |
| 620mm x 620mm x 63mm | 12-35W | 1,825-5,100lm | <22 |
| 620mm x 620mm x 63mm | 12-35W | 1,625-4,450lm | <19 |

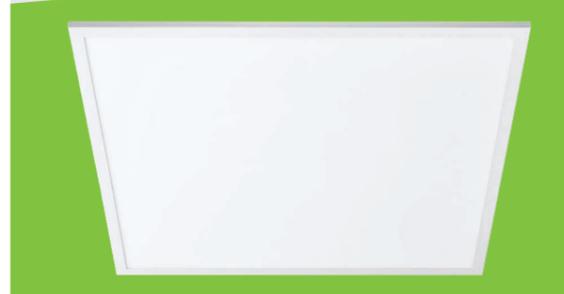


SYLVANIA Rana Linear Recessed



Features

- Perfect for educational environments, storage facilities, offices, data centers, long corridors and other circulation areas
- High efficiency, up to 120lm/W
- Linear recessed luminaires
- 3 different optics offer 3 different light distribution with visual comfort and efficacy
- Controlled light distribution with Micro Prismatic Optics
- Optimal visual comfort (UGR<19) with Louvre + Prismatic Optics
- Pure line of light with Opal diffuser
- Available in 3,000K or 4,000K
- Long lifetime: 60,000 hours

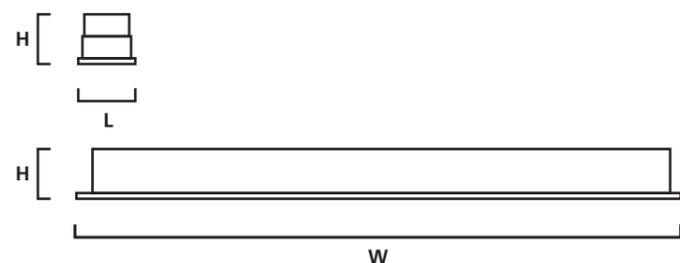



| Size (W x L x H) | Version | Wattage | Lumen | UGR |
|----------------------|----------|---------|---------|-----|
| 1154mm x 90mm x 91mm | MPO | 31W | 3,100lm | <21 |
| 1154mm x 90mm x 91mm | LOUV+PRI | 27W | 3,250lm | <19 |
| 1154mm x 90mm x 91mm | OPAL D | 31W | 3,270lm | <23 |

SYLVANIA Rana NEO Recessed



Features

- Perfect for working areas such as offices, schools and circulation areas
- High Lumen Efficiency, up to 123lm/W
- Sleek and unobtrusive square profile design, to blend into any lighting scheme
- Designed for 600 x 600, 1200 x 300, 625 x 625, 1250 x 310
- Low luminance for Display Screen Equipment (DSE) workstations
- Low LED Flicker (<5%)
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

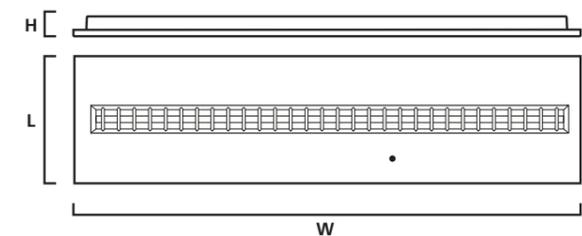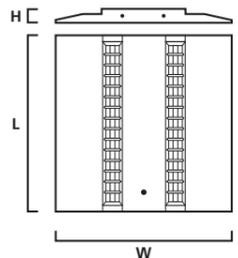

| Size (W x L x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 595mm x 595mm x 52mm | 30W | 3,527lm | <19 |
| 1196mm x 296mm x 51mm | 30W | 3,761lm | <19 |
| 618mm x 618mm x 52mm | 30W | 3,500lm | <19 |
| 1248mm x 308mm x 51mm | 30W | 3,750lm | <19 |




SYLVANIA Optix Recessed




Features

- Designed for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 147lm/W
- Glare control optics available in two finishes (UGR<16 with aluminised optics, UGR<19 with white optics)
- Modular design allows for a range of sizes to suit the building layout
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 70,000 hours

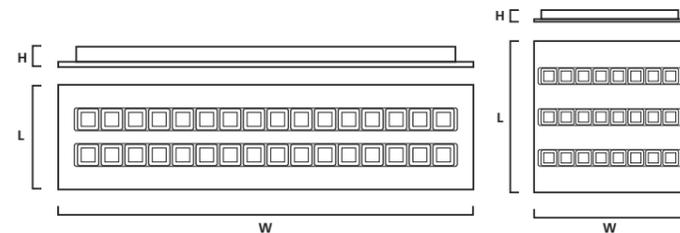

| Size (W x L x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 600mm x 600mm x 38mm | 21W | 2,800lm | <16 |
| 600mm x 600mm x 38mm | 20W | 2,850lm | <19 |
| 600mm x 600mm x 38mm | 26W | 3,400lm | <16 |
| 600mm x 600mm x 38mm | 23W | 3,350lm | <19 |
| 600mm x 600mm x 38mm | 33W | 4,500lm | <16 |
| 600mm x 600mm x 38mm | 31W | 4,550lm | <19 |
| 625mm x 625mm x 38mm | 26W | 3,600lm | <16 |
| 625mm x 625mm x 38mm | 24W | 3,450lm | <19 |
| 1200mm x 300mm x 38mm | 26W | 3,600lm | <16 |
| 1200mm x 300mm x 38mm | 24W | 3,450lm | <19 |
| 1250mm x 310mm x 38mm | 26W | 3,600lm | <16 |
| 1250mm x 310mm x 38mm | 24W | 3,450lm | <19 |

SYLVANIA Optix Linear Recessed

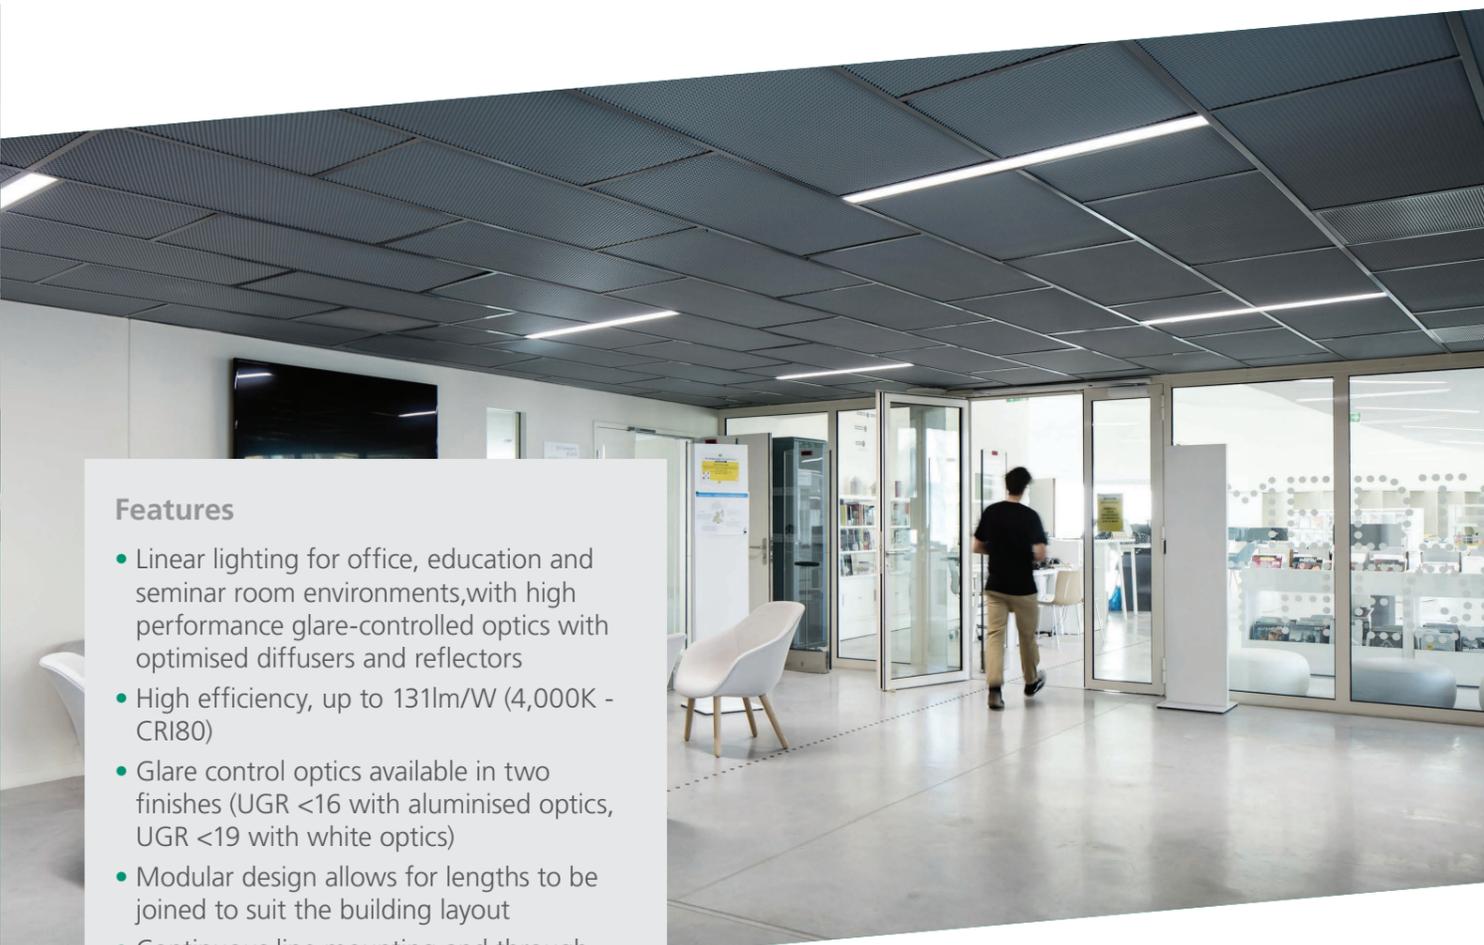


Features


- Linear lighting for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 131lm/W (4,000K - CRI80)
- Glare control optics available in two finishes (UGR <16 with aluminised optics, UGR <19 with white optics)
- Modular design allows for lengths to be joined to suit the building layout
- Continuous line mounting and through wiring options available with accessories
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours



| Size (W x L x H) | Wattage | Lumen | UGR |
|----------------------|---------|---------|-----|
| 1200mm x 90mm x 89mm | 26W | 3,400lm | <19 |

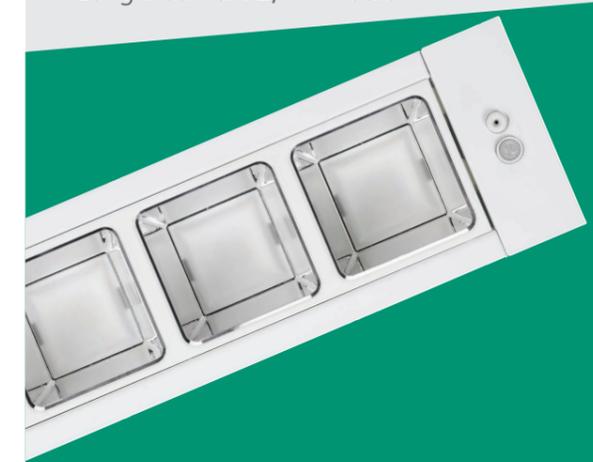


SYLVANIA Optix 4 Cells

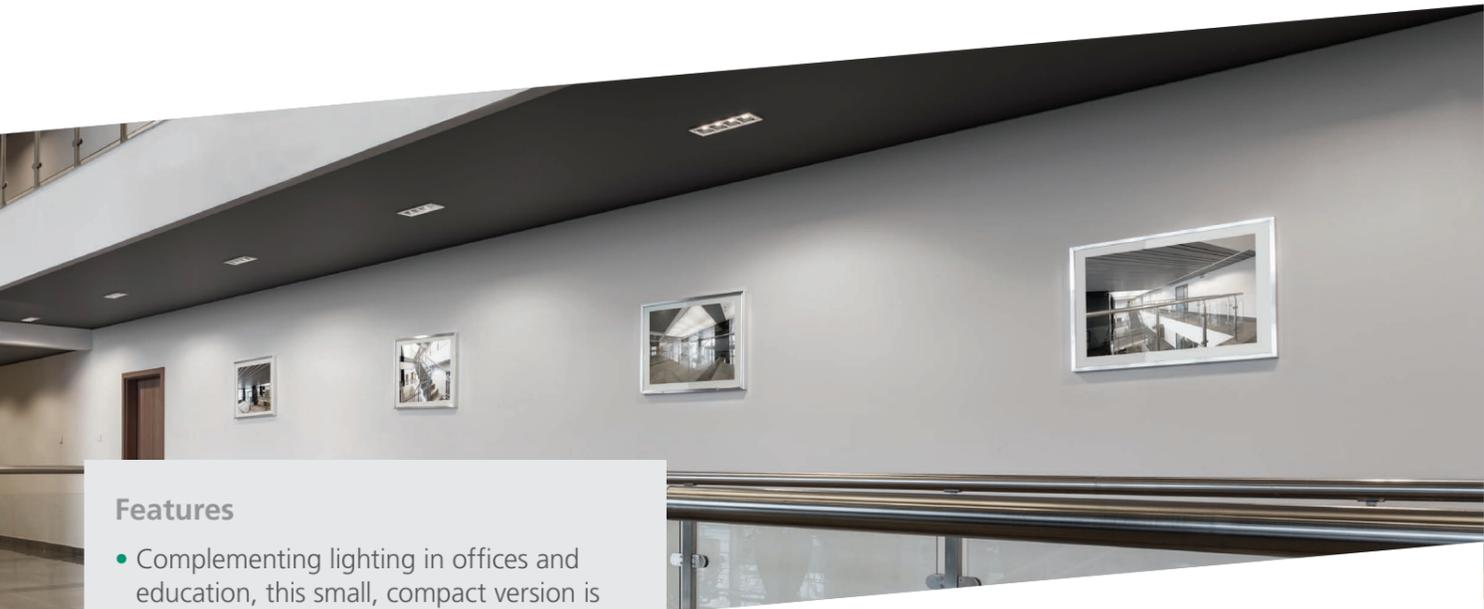

Features

- Complementing lighting in offices and education, this small, compact version is ideal for lighting perimeters and smaller spaces. High efficiency, up to 122lm/W
- High quality steel housing, plastic optical unit and reflector
- Optics available in two finishes (office compliant UGR<18 with aluminised optics, white optic makes lighting more visible for a brighter ceiling)
- Modular design allows for a range of sizes to suit the building layout
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

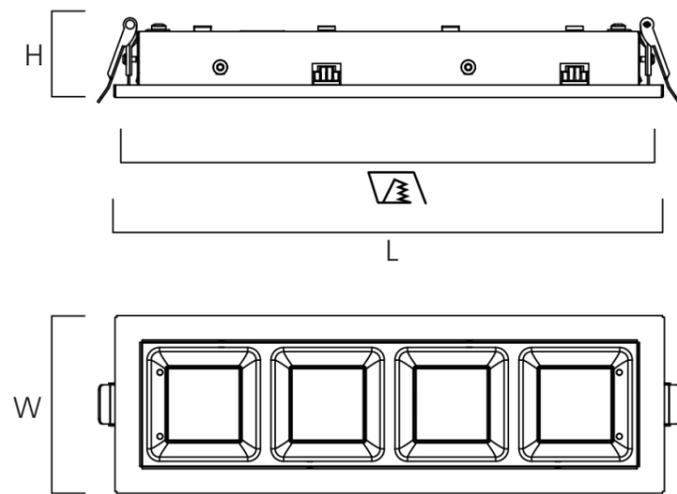


| Size (W x L x H) | Cutout | Wattage | Lumen | UGR |
|-----------------------|----------|---------|---------|-----|
| 310mm x 100mm x 45 mm | 305 x 82 | 9W | 1,098lm | <22 |
| 310mm x 100mm x 45 mm | 305 x 82 | 9W | 1,010lm | <18 |



For ordering guide please visit page XX.


sylvania-lighting.com

SYLVANIA Optix MPO Suspended

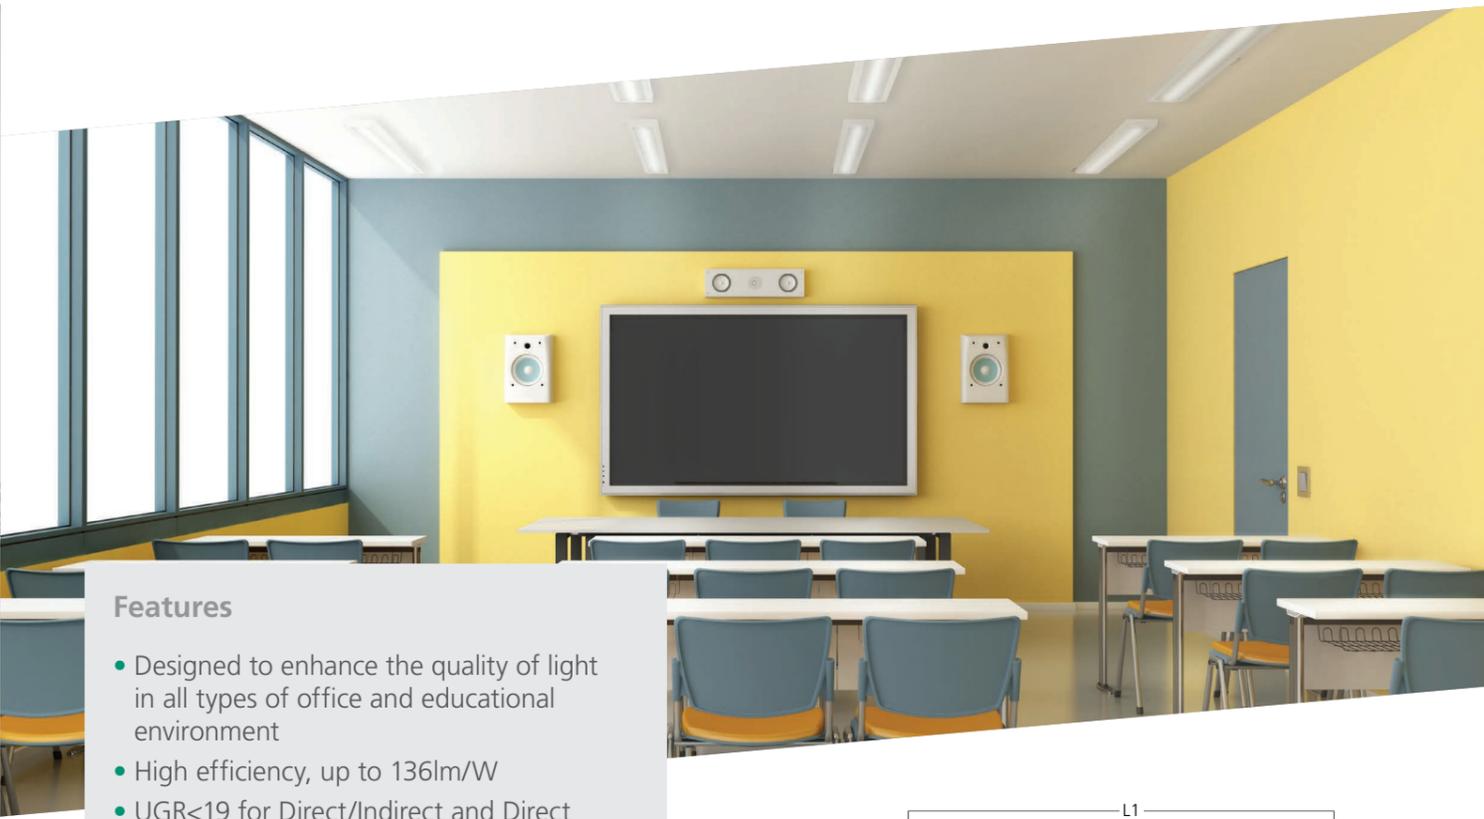

Features

- Designed to enhance the quality of light in all types of office and educational environment
- High efficiency, up to 136lm/W
- UGR<19 for Direct/Indirect and Direct standard output
- Direct and Direct/indirect light distribution
- Standard and high lumen option up to 5750lm
- Body: sheet steel painted white (RAL9016)
- Optic: micro-prismatic acrylic diffuser
- Available in 4,000K
- Long lifetime: 100,000 hours

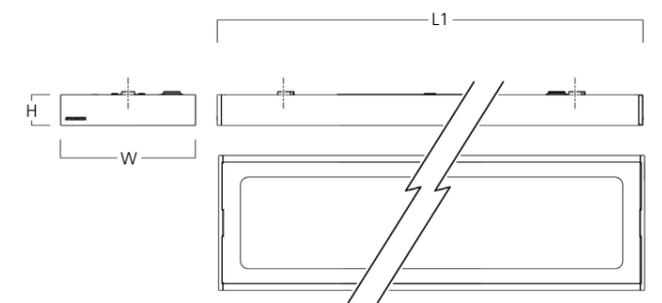


| Size (L x W x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 1200mm x 200mm x 50mm | 23W | 2,863lm | <19 |
| 1200mm x 200mm x 50mm | 30W | 3,550lm | <19 |
| 1200mm x 200mm x 50mm | 36W | 4,990lm | <19 |
| 1200mm x 200mm x 50mm | 44W | 5,770lm | <19 |



For ordering guide please visit page XX.


sylvania-lighting.com

SYLVANIA Optix Surface & Suspended

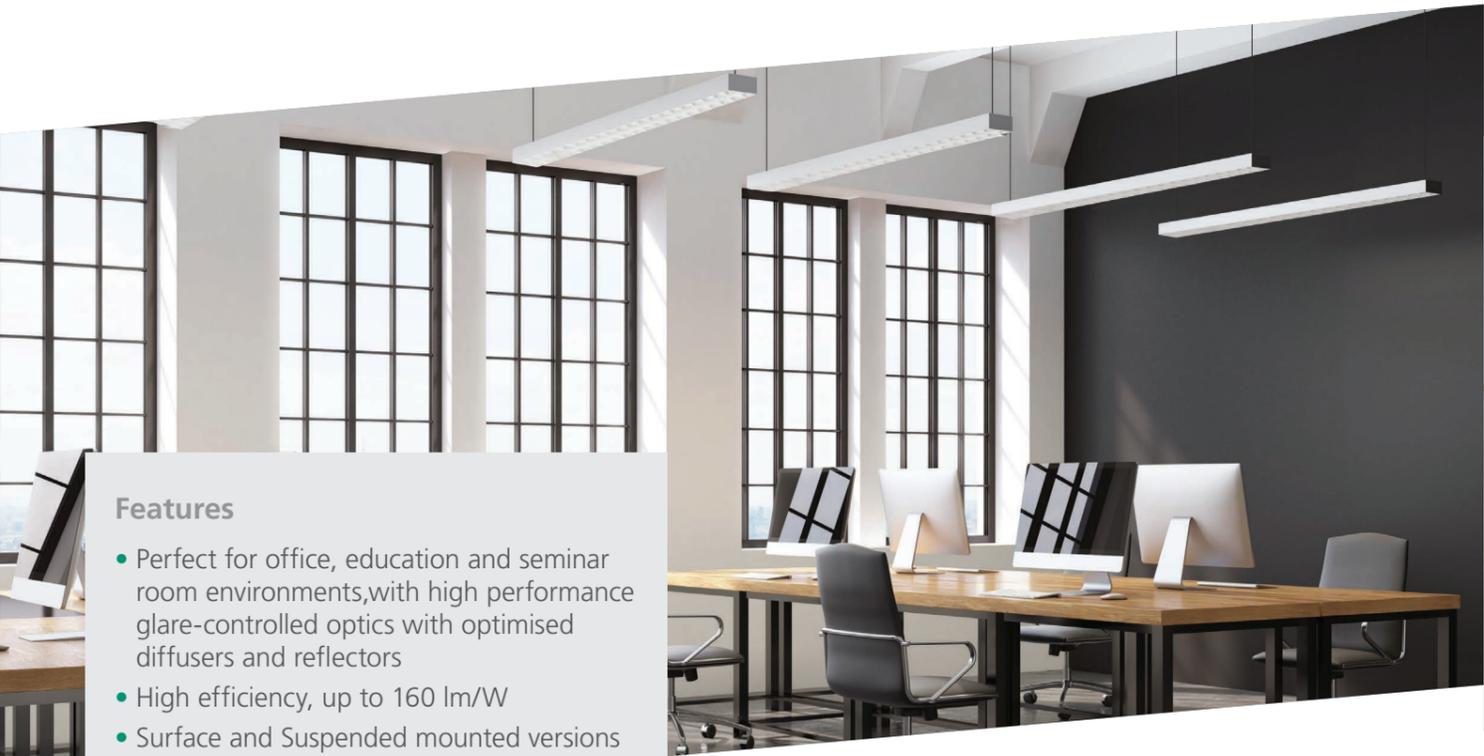

Features


- Perfect for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 160 lm/W
- Surface and Suspended mounted versions of the Optix family
- Suspended luminaires available with Direct / Indirect lighting for visual comfort
- Low LED flicker <5%
- Glare control optics available in two finishes (UGR<16 with aluminised optics, UGR<19 with white optics)
- Available in 3,000K or 4,000K
- Suspension accessories are separately available based on installation needs
- Continuous line mounting and through wiring options available with accessories
- Long lifetime: 100,000 hours

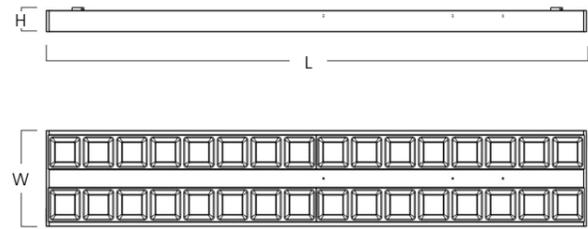

| Size (W x L x H) | Lighting Distribution | Wattage | Lumen | UGR |
|-----------------------|-----------------------|---------|---------|-----|
| 1130mm x 200mm x 50mm | D | 26W | 3,600lm | <16 |
| 1130mm x 200mm x 50mm | D | 23W | 3,600lm | <19 |
| 1130mm x 200mm x 50mm | D/I | 29W | 4,100lm | <16 |
| 1130mm x 200mm x 50mm | D/I | 25W | 4,100lm | <19 |
| 1130mm x 200mm x 50mm | D/I | 36W | 5,600lm | <16 |
| 1130mm x 200mm x 50mm | D/I | 35W | 5,600lm | <19 |
| 1410mm x 200mm x 50mm | D/I | 49W | 7,000lm | <14 |
| 1410mm x 200mm x 50mm | D/I | 44W | 7,000lm | <19 |





SYLVANIA Rana Surface & Suspended

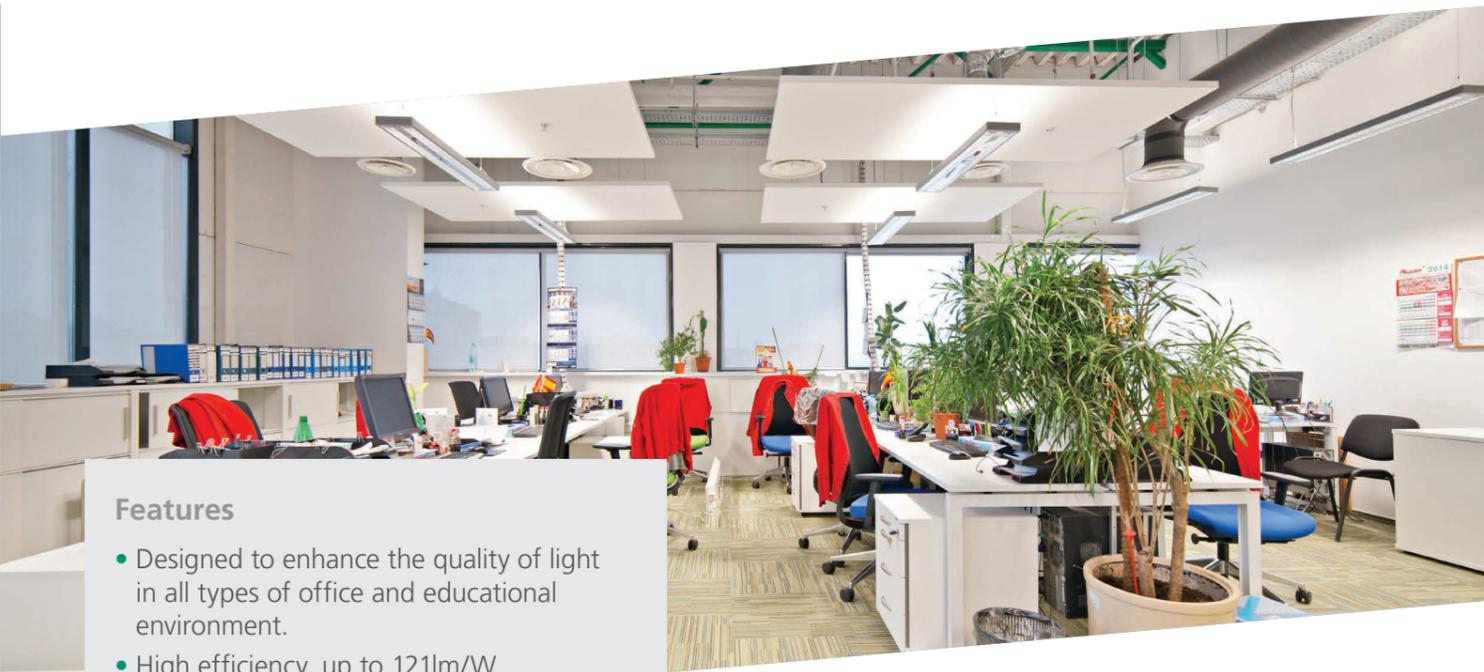

Features


- Designed to enhance the quality of light in all types of office and educational environment.
- High efficiency, up to 121lm/W
- Surface and suspended models can be mounted individually or in continuous runs
- Available in 3,000K or 4,000K
- Outstanding glare control. All products are UGR<19. UGR=16 available with LO range
- Closed optical system with protective covers on LED modules
- Long lifetime: 50,000 hours

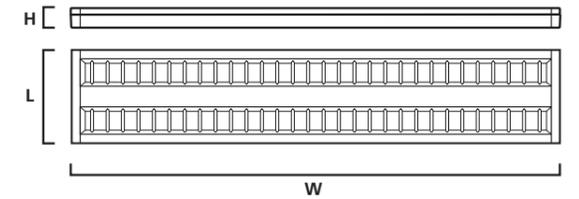

| Size (W x L x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 616mm x 616mm x 47mm | 28W | 3,000lm | <16 |
| 616mm x 616mm x 47mm | 40W | 4,500lm | <19 |
| 1160mm x 187mm x 47mm | 28W | 3,100lm | <19 |
| 1160mm x 187mm x 47mm | 52W | 6,000lm | <19 |
| 1160mm x 187mm x 47mm | 28W | 3,250lm | — |
| 1440mm x 187mm x 47mm | 34W | 4,000lm | <19 |
| 1440mm x 187mm x 47mm | 62W | 7,500lm | <19 |
| 1440mm x 187mm x 47mm | 34W | 4,100lm | — |




SYLVANIA Optix Linear Surface & Suspended

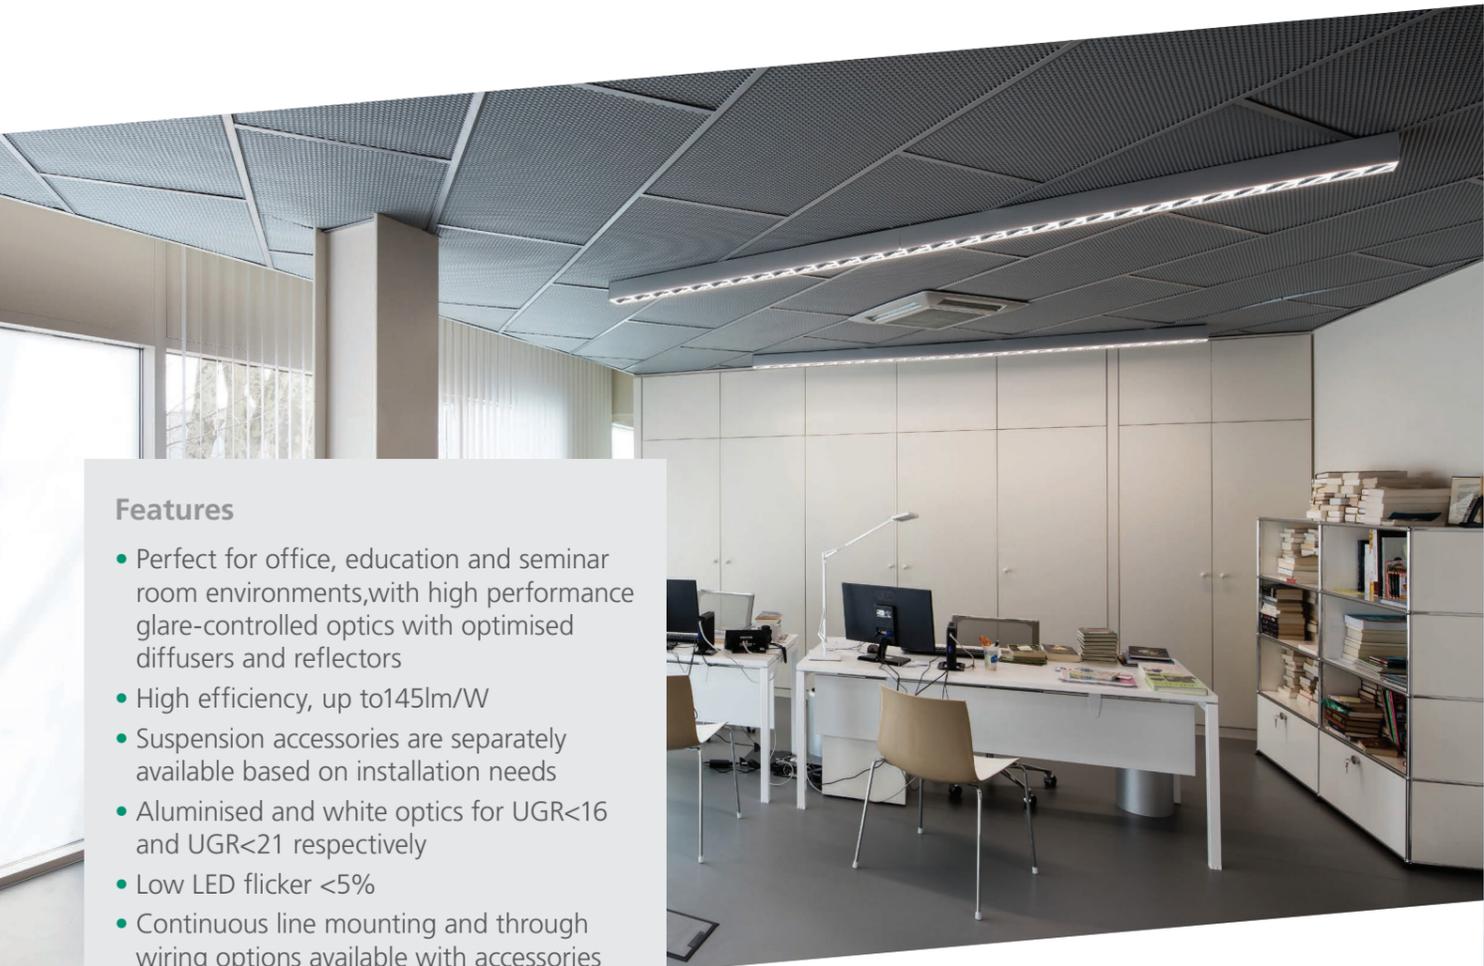


Features

- Perfect for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 145lm/W
- Suspension accessories are separately available based on installation needs
- Alumined and white optics for UGR<16 and UGR<21 respectively
- Low LED flicker <5%
- Continuous line mounting and through wiring options available with accessories
- Mechanical, suspending and through wiring accessories available on request
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

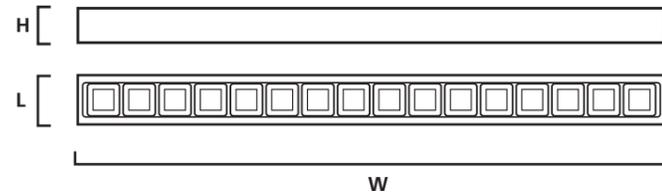


| Size (W x L x H) | Lighting Distribution | Wattage | Lumen | UGR |
|----------------------|-----------------------|---------|---------|-----|
| 1130mm x 90mm x 86mm | D | 26W | 3,400lm | <16 |
| 1130mm x 90mm x 86mm | D/I | 31W | 4,500lm | <16 |

SYLVANIA Rana Linear Surface & Suspended

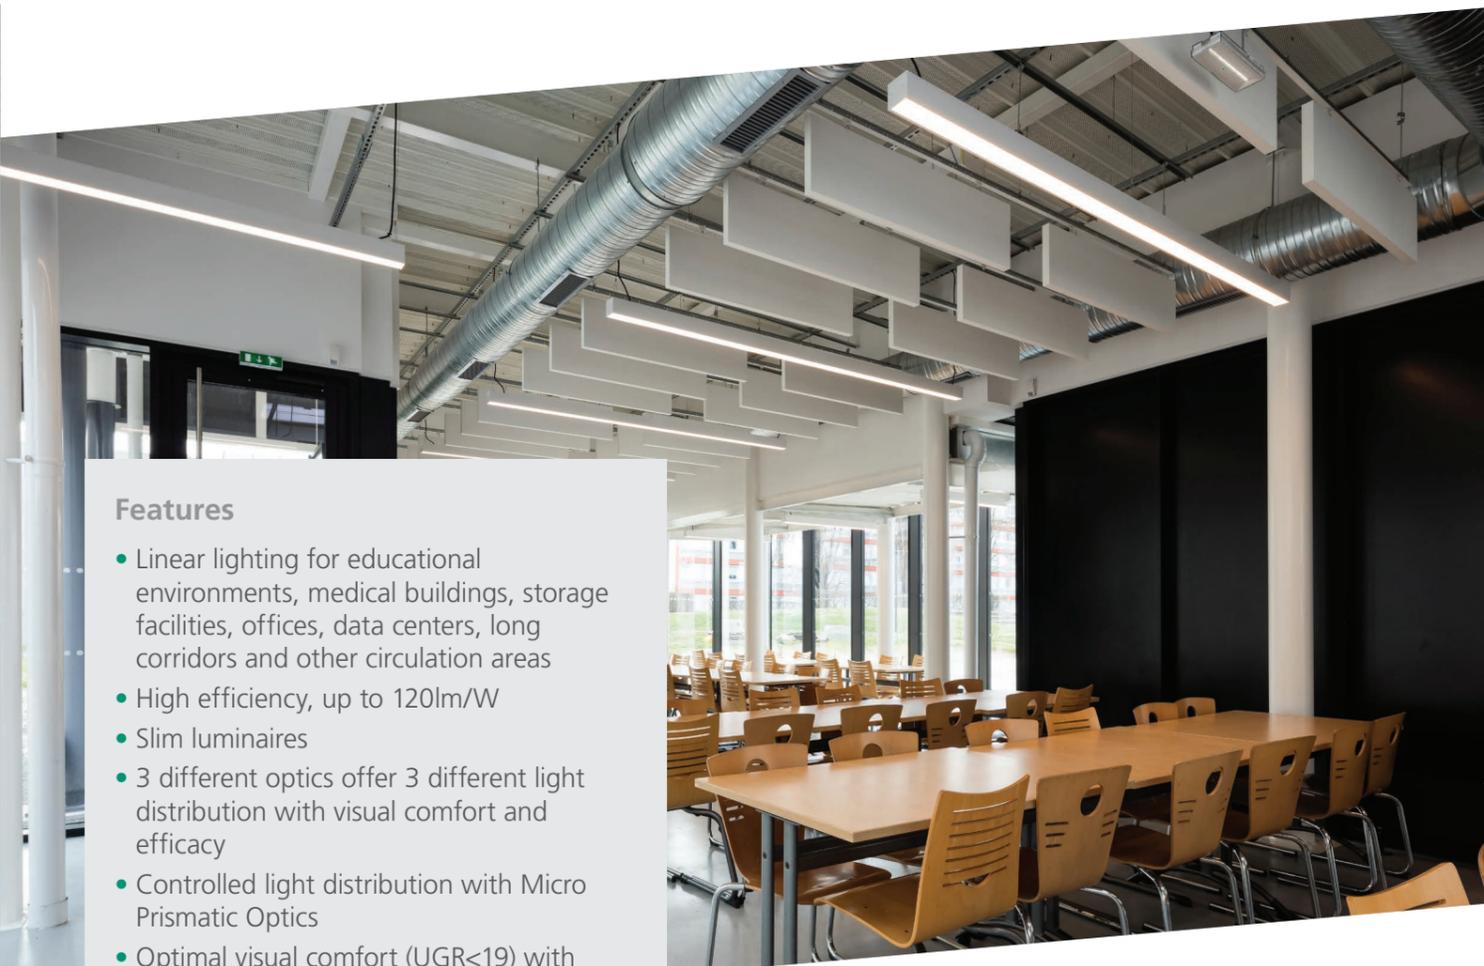


Features

- Linear lighting for educational environments, medical buildings, storage facilities, offices, data centers, long corridors and other circulation areas
- High efficiency, up to 120lm/W
- Slim luminaires
- 3 different optics offer 3 different light distribution with visual comfort and efficacy
- Controlled light distribution with Micro Prismatic Optics
- Optimal visual comfort (UGR<19) with Louvre + Prismatic Optics
- Pure line of light with Opal diffuser
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

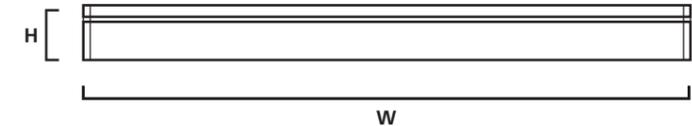


| Size (W x L x H) | Version | Wattage | Lumen | UGR |
|----------------------|-----------|---------|---------|-----|
| 1150mm x 87mm x 87mm | MPO | 31W | 3,100lm | <21 |
| 1150mm x 87mm x 87mm | LOUV+PRI | 27W | 3,250lm | <19 |
| 1150mm x 87mm x 87mm | OPAL D 31 | 31W | 3,270lm | <23 |

SYLVANIA Rana Neo Surface & Suspended

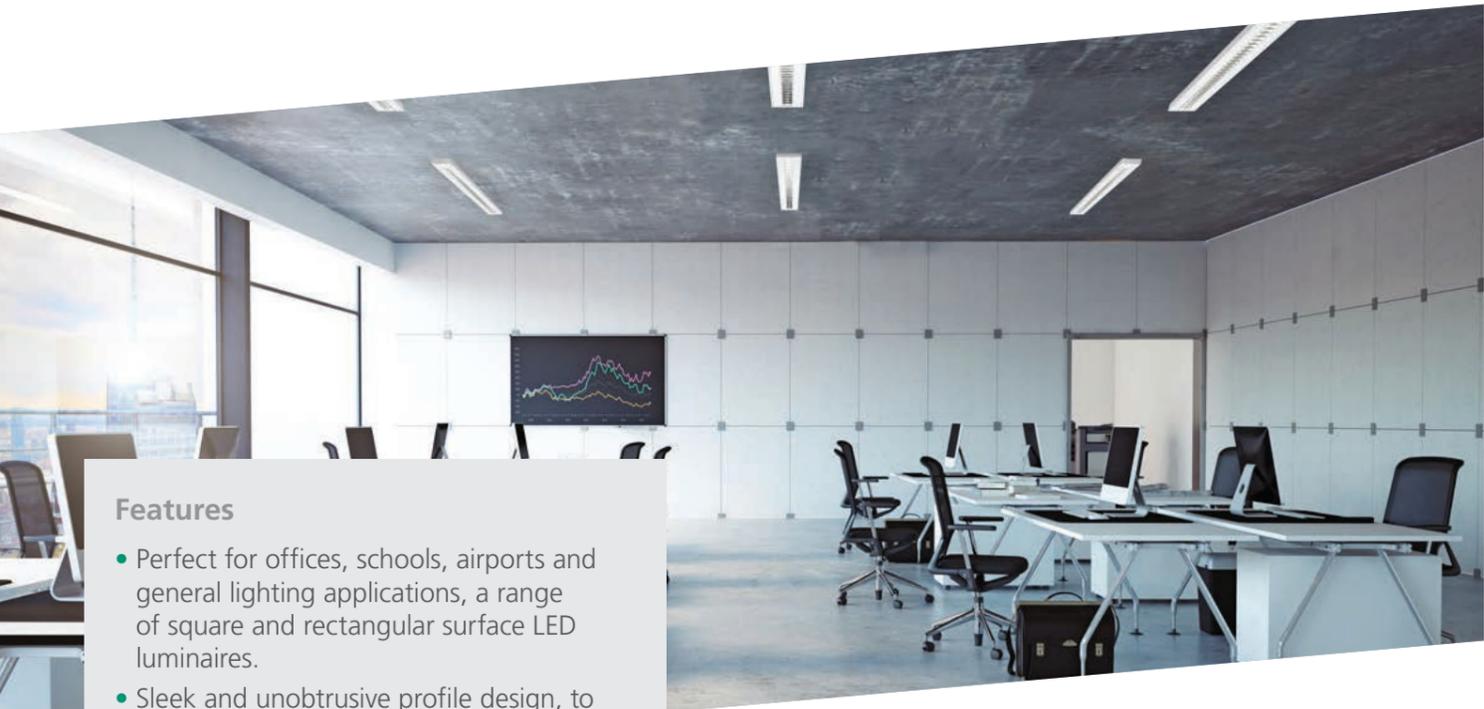

Features


- Perfect for offices, schools, airports and general lighting applications, a range of square and rectangular surface LED luminaires.
- Sleek and unobtrusive profile design, to mix and match recessed, surface mounted and suspended in a single lighting scheme
- Glow Wire Test: 850°C for all versions - Polycarbonate diffusers are UK TP(a) compliant
- Low LED Flicker (<5%)
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

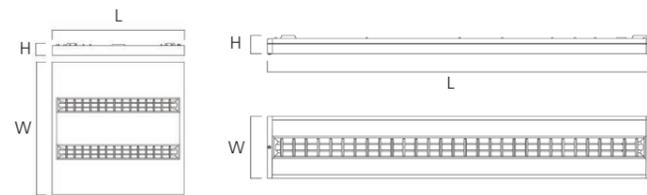


| Size (L x W x H) | Wattage | Lumen | UGR |
|-----------------------|---------|---------|-----|
| 595mm x 595mm x 52mm | 30-33W | 3,350lm | <15 |
| 618mm x 618mm x 52mm | 30-33W | 3,527lm | <15 |
| 1196mm x 296mm x 51mm | 30-33W | 3,270lm | <18 |
| 1246mm x 308mm x 51mm | 30-33W | 3,761lm | <18 |

Rana / Optix Accessories


Sylvania Rana Surface and Suspended, Sylvania Rana Neo Recessed / Surface and Suspended

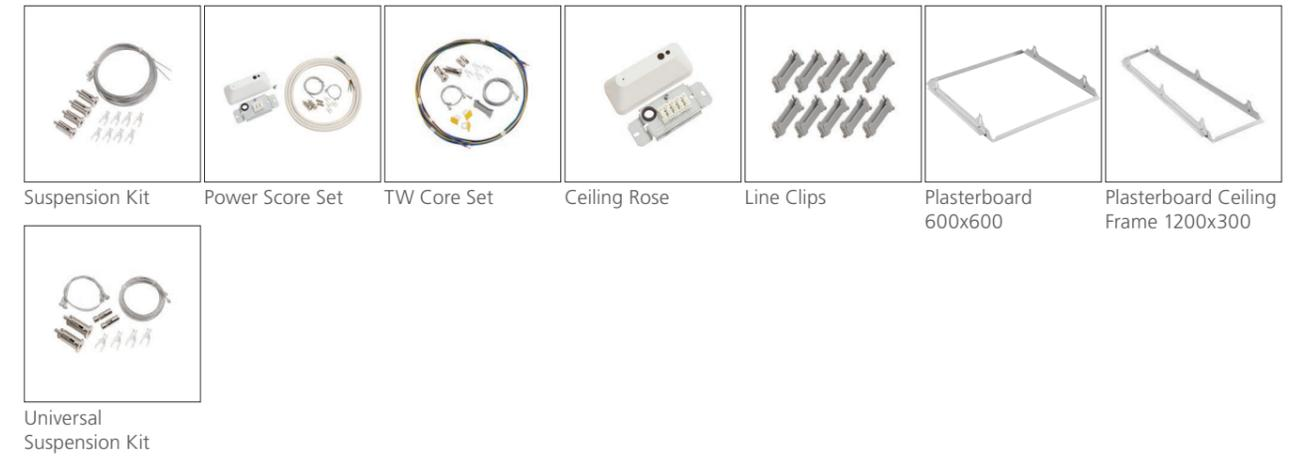


Sylvania Rana Linear Recessed / Surface and Suspended

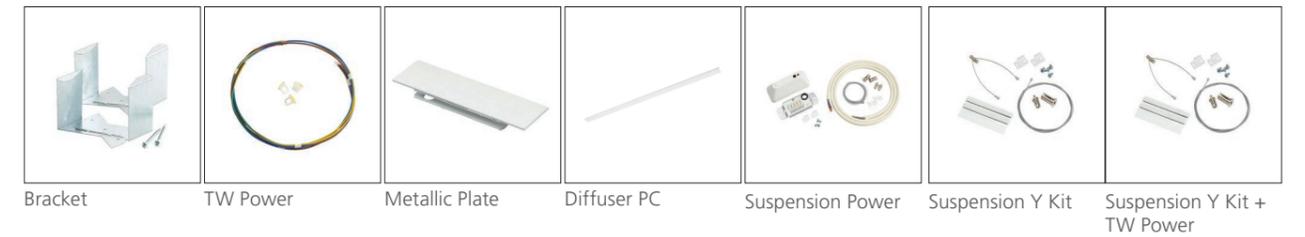

Sylvania Optix Recessed / Surface and Suspended

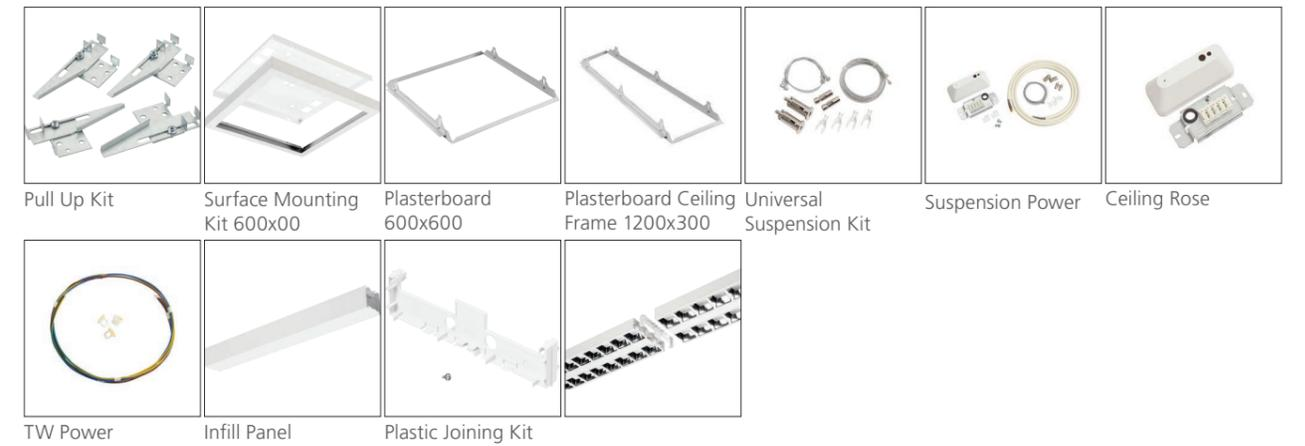

Sylvania Optix Linear Recessed / Surface and Suspended

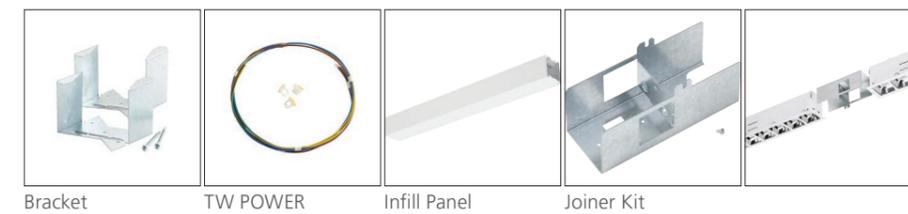


SYLVANIA SylPendant




Features

- Ideal for providing decorative features in hospitality areas, bars and restaurants as well as in living rooms or reception spaces
- Sleek and compact metal pendant with the E27 socket
- Designed specifically to enhance the aesthetic of the room
- Modern and versatile design
- Available in black, brass, copper and white finish
- Maximum rated LED lamp wattage = 25W
- Perfect for Sylvania lampnaire range, compatible with Sylvania pendant lamps

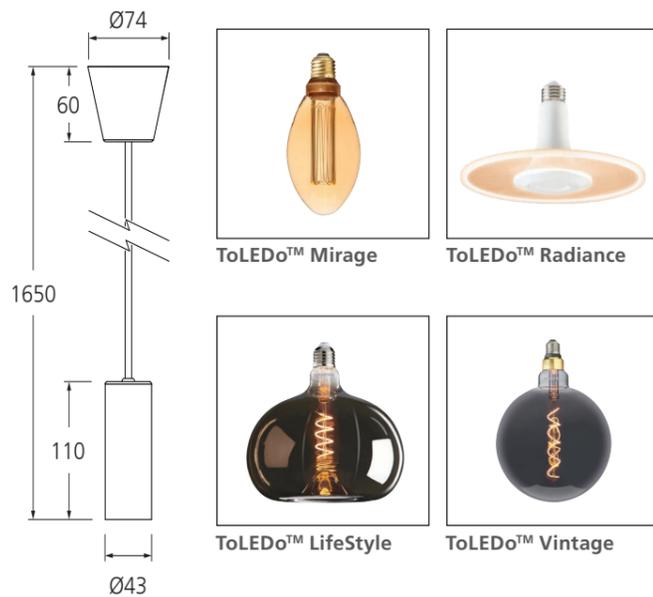


* See Sylvania Lamps Catalogue for full lamps range

SYLVANIA SylPendant Vintage

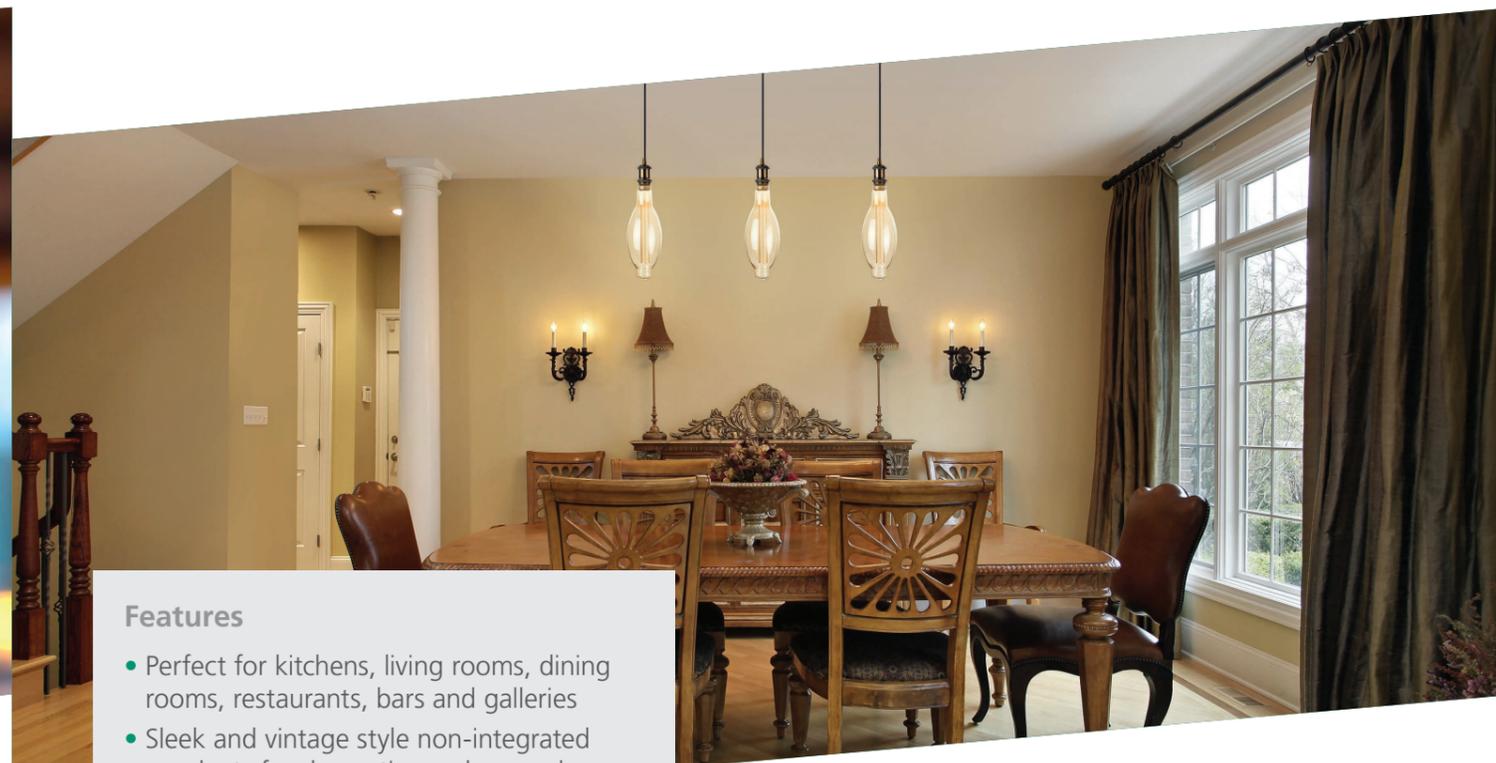


Features

- Perfect for kitchens, living rooms, dining rooms, restaurants, bars and galleries
- Sleek and vintage style non-integrated pendants for decorative and general lighting applications
- Metal housing with premium fit and finish
- Adjustable black fabric cable included
- A choice of single or triple pendant fittings
- Maximum recommended LED lamp wattage: 25W, E27 lamp base
- Easy-to-install with an Edison screw cap
- Perfect for Sylvania lampnaire range, compatible with Sylvania pendant lamps

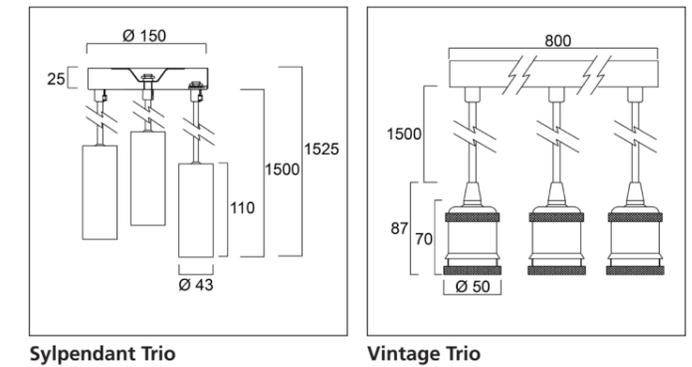

SylPendant Trio

Vintage Trio

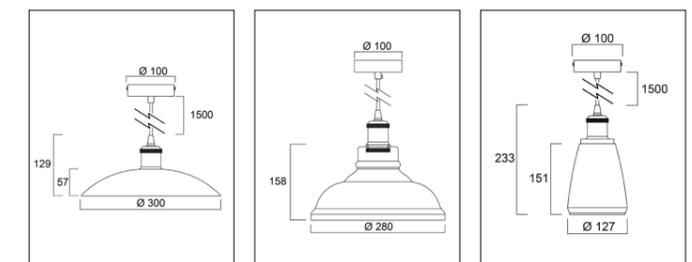

Vintage Luna

Vintage Arc

Vintage Flare

* See Sylvania Lamps Catalogue for full lamps range



STARTTM eco Downlight 5 in 1



Features

- The 5in1 downlights all come complete with a 3 colour temperature choices (3,000K, 4,000K and 6,500K selected via a 3-way switch located on the back of the fixture) and two mounting methods (recessed or surface mounted)
- A choice 6 different sizes allow for a lumen output of 600lm up to 2,500lm
- Perfect for retro fit applications
- Adjustable mounting bracket allows for each luminaire to retro fit into a range of existing ceiling cut-out sizes
- PIR sensor version available with adjustable time and lumen levels
- Loop-in/Loop-out box included for ease of installation
- Lifetime: 30,000 hours


Accessories



Polished Chrome Bezel Black Bezel

Square

Round



| Size (W x L x H) | Cut Out | Wattage | Lumen |
|----------------------|-----------|---------|---------|
| ø164mm x 15mm | ø50-125mm | 6W | 600lm |
| ø164mm x 15mm | ø50-125mm | 11W | 1,150lm |
| ø217mm x 15mm | ø55-175mm | 18W | 1,850lm |
| ø292mm x 15mm | ø55-250mm | 18W | 1,900lm |
| ø292mm x 15mm | ø55-250mm | 23W | 2,500lm |
| ø217mm x 15mm | ø55-175mm | 21W | 2,000lm |
| 293mm x 293mm x 15mm | 55-250mm | 24W | 2,100lm |



For ordering guide please visit page XX.


sylvania-lighting.com

STARTTM Downlight IP44



Features

- High efficiency downlights perfect for corridors, bathrooms, receptions and back of house areas
- Energy efficient of up to 113lm/W
- High output up to 2,325lm
- IP44 rating allows for installation in wet areas
- 3 hour emergency pack available
- Loop in-Loop out facility with push fit terminal block for quick wiring
- Shallow recess depth of <65mm
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

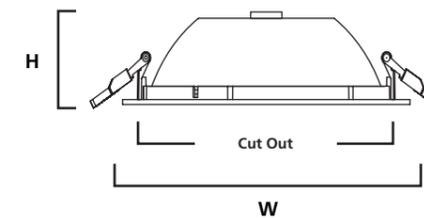

| Size (W x L x H) | Cut Out | Wattage | Lumen |
|-------------------|---------|---------|---------|
| NEW ø109mm x 38mm | ø90mm | 7,8W | 880lm |
| ø164mm x 45mm | ø150mm | 12W | 1,175lm |
| ø195mm x 55mm | ø175mm | 15W | 1,525lm |
| ø220mm x 60mm | ø205mm | 21W | 2,025lm |
| ø240mm x 65mm | ø225mm | 24W | 2,325lm |



For ordering guide please visit page XX.

sylvania-lighting.com

START

Flex Single Colour



START


Flex Single Colour HO




Features

- LED strip for use indoors IP20 and in kitchen or bathroom areas (IP65)
- High efficiency up to 119 lm/W
- 2,500lm per 5m with 300pcs LED chips for indoor use
- CRI>80 and SDCM<3 meets requirements for most applications and provides uniform light.
- LED drivers ordered separately
- A selection of aluminium profiles available
- IP65 version supplied with end cap and silicone
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

IP20

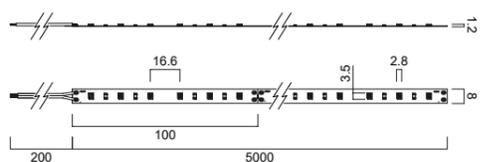

IP65

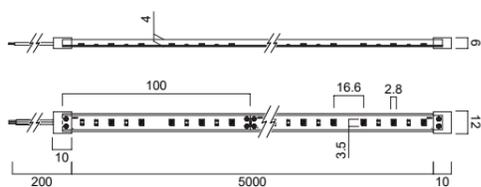


For ordering guide please visit page XX.

sylvania-lighting.com


Features

- High output LED strip for use indoors IP20 and in kitchen or bathroom areas (IP65)
- High efficiency up to 142lm/W
- 11,750lm per 5m with 420pcs LED chips for indoor use
- CRI>80 and SDCM<3 meets requirements for most applications and provides uniform light.
- LED drivers ordered separately
- A selection of aluminium profiles available
- IP65 version supplied with end cap and silicone
- Use of aluminium profile recommended
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

IP20

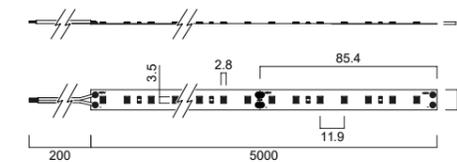

IP65

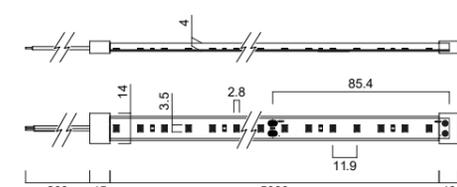

For ordering guide please visit page XX.

sylvania-lighting.com

59


58

START Flex IP67




Features

- LED strip designed for decorative / ambient lines of light
- Upto 5000lm per 5m length
- 300 pieces of LED per 5m length
- CRI>80 and SDCM<3 meets requirements for most applications and provides uniform light.
- All come with 3m adhesive tape, mounting clips and end caps
- Can be cut on the site with cut points every 50mm
- For indoor and outdoor applications
- LED drivers must be ordered seperately
- Selection of aluminium profiles available
- Available in 2,700K, 3,000K or 4,000K
- Lifetime : 30,000 hours

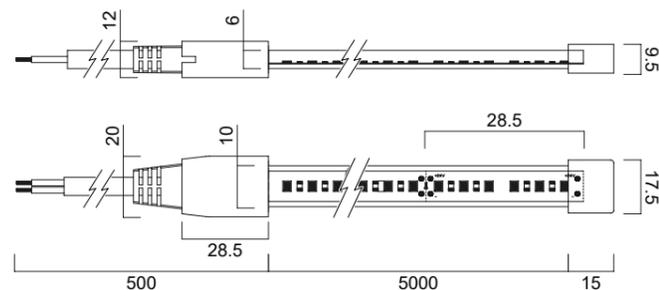

START Flex RGB & RGBW

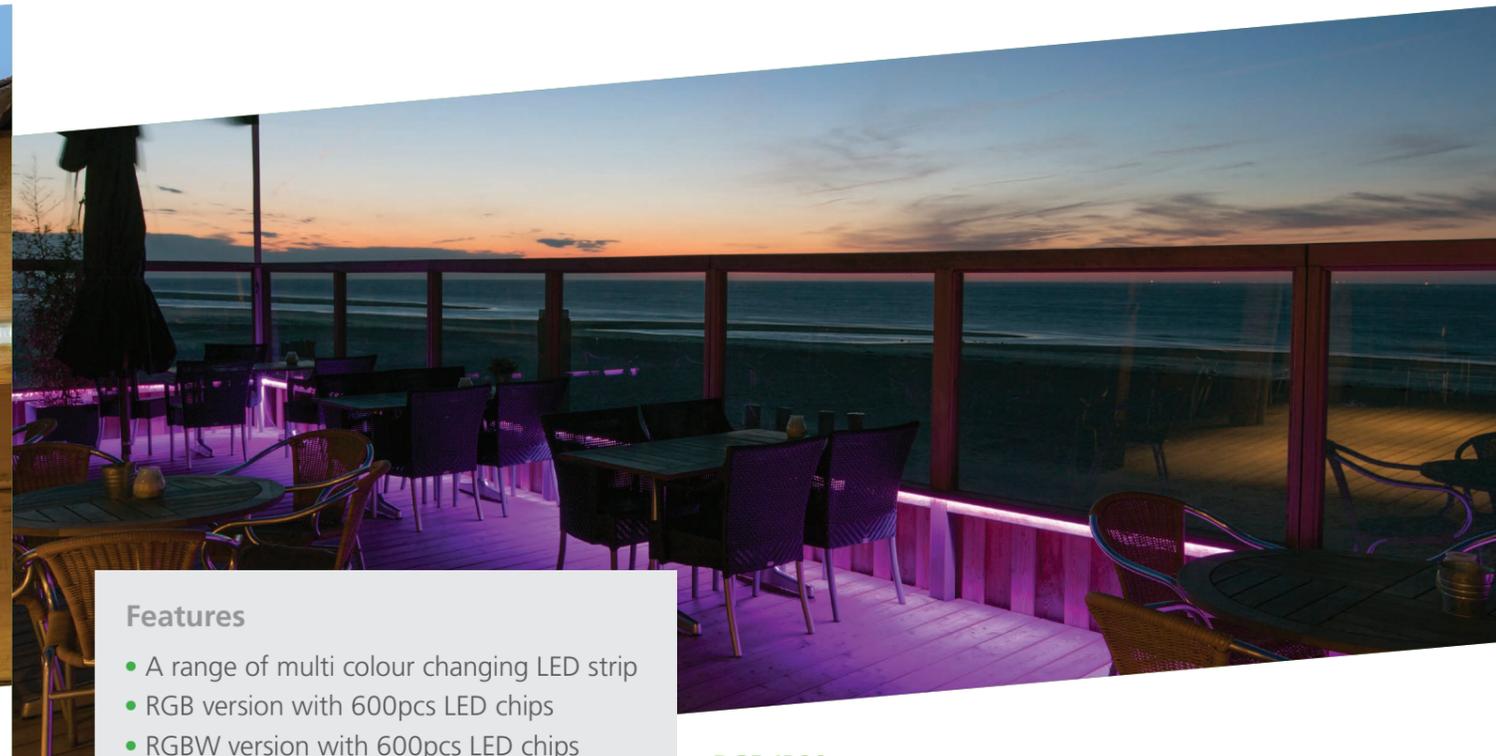


Features


- A range of multi colour changing LED strip
- RGB version with 600pcs LED chips
- RGBW version with 600pcs LED chips
- IP20 for indoor and IP67 for outdoor applications
- CRI>80 and SDCM<3 meets requirements for most applications and provides uniform light.
- Supplied with 3m adhesive tape and mounting clips / end caps (IP67)
- LED RGB and RGBW drivers and controllers ordered seperately
- Selection of aluminium profiles available
- Lifetime : 30,000 hours




RGB IP20

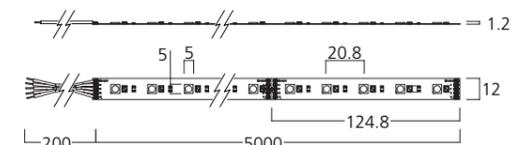

RGB IP65

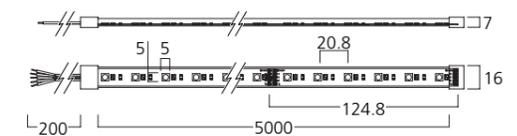

RGBW IP20

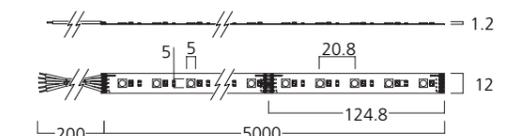

RGB IP65

